

#### HINS Beam Absorber MARS15 Simulations

Nikolai Mokhov

HINS Meeting Fermilab April 16, 2010

#### HINS Beam Absorber Simulation Specs (B. Webber)

It is the SNS absorber housed in a rectangular steel box loaded with high-density (not borated) polyethylene beads (if it matters). The SNS absorber consists of a 1mm thick cone fabricated of pure nickel surrounded by a 1mm water cooling channel inside a 1.5mm stainless steel jacket. Assume the cooling water flow rate is 3 gpm. The absorber in the HINS beam enclosure is shown at one location for 3 MeV beam and and at two possible locations for 10 MeV beam.


The beam should be assumed to have symmetrical Gaussian transverse distribution with sigma-x = sigma-y = 10 mm.

Beam intensity is 1% of 25 mA (5.6E18 pph) at 3 MeV (750W) and at 10 MeV (2.5kW).


Assume maximum 500 hours operation per year for 2.8E21 protons per year.

Absorber sits on steel-legged stand with beam center 128.5 cm above floor.


#### Absorber Locations in HINS Beam Enclosure

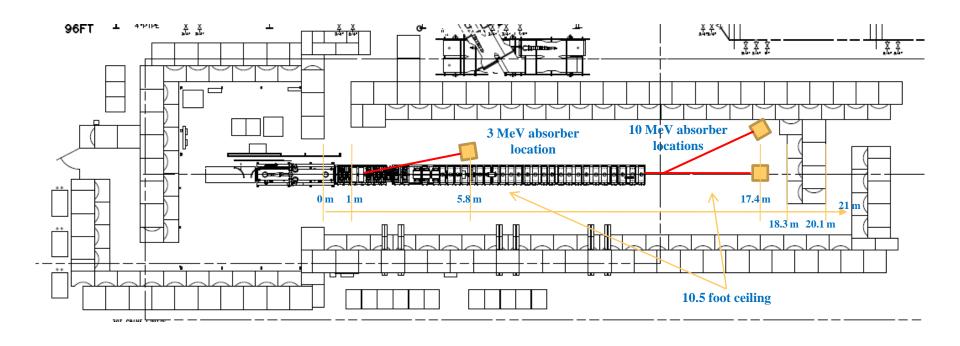

# Physical Design of HINS Absorber

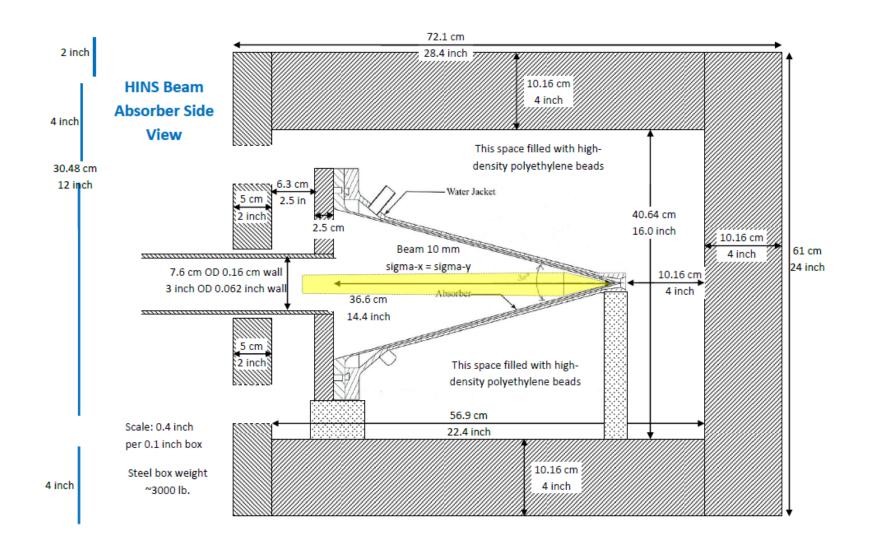


#### Absorber Front View

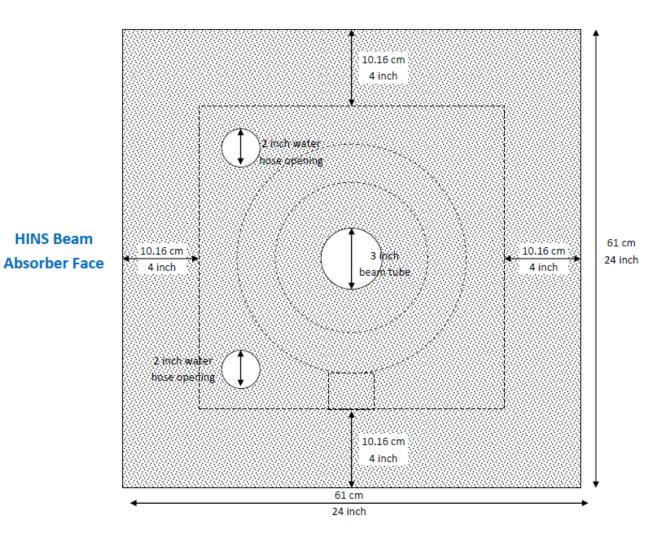


## Questions for Study (B. Webber)

- What are prompt radiation dose rates outside the shielding box of the absorber and outside the shielding enclosure of the Linac for each of the possible beam energies and absorber locations?
- At what level, if any, is there concern for cooling water activation that would require a closed-loop radioactivewater cooling system?
- From a radiation shielding perspective, in what ways might the shielding box of the absorber be simplified or reduced in size or weight?

## Absorber MARS Model (1)

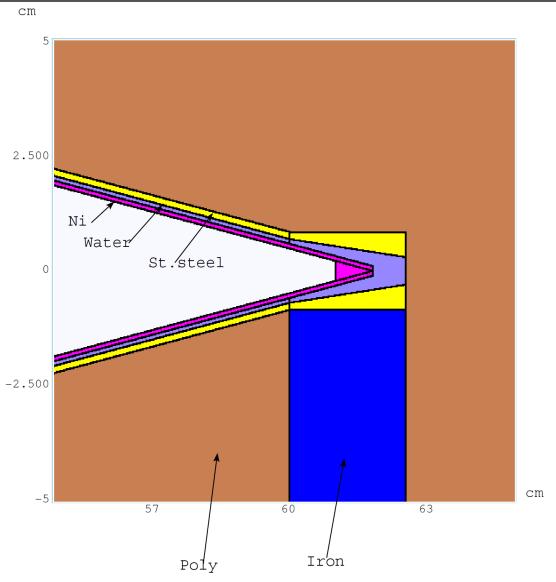

#### Absorber MARS Model (2)

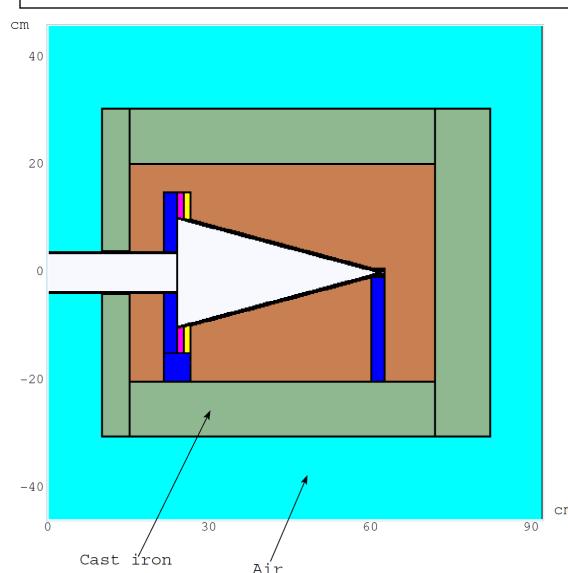



For 3 and 10 MeV beams at 1.556e15 p/s with and without poly filler calculated:

- 1. Prompt dose (mSv/hr)
- 2. Residual dose (mSv/hr) on contact for 30-day irradiation and 1-day cooling
- 3. Power density (mW/g)
- 4. Neutron and photon spectra

cm Note: 1 mSv/hr = 100 mrem/hr


#### Prompt Dose at 3 MeV

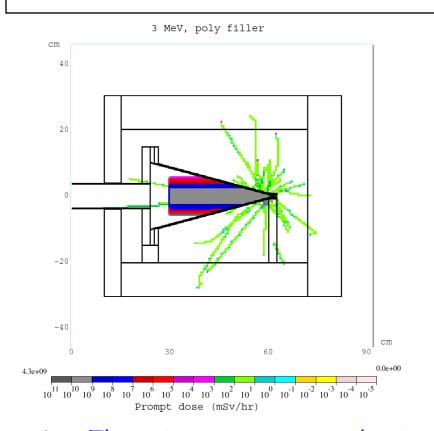


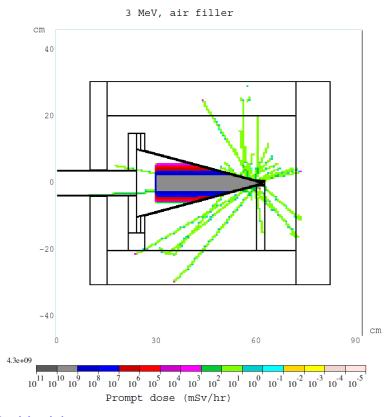

- There is no neutron production at 3 MeV.
- No activation.
- No poly filler needed.
- Iron shielding thickness can be reduced from 4" to 1" to take care of soft X-rays not included in this modeling.
- 5. Enlarge beam pipe OD or reduce beam size?
  HINS Meeting April 16, 2010
  MARS Modeling of Beam Absorber N.V. Mokhov


## Prompt Dose and Power Density at 3 MeV

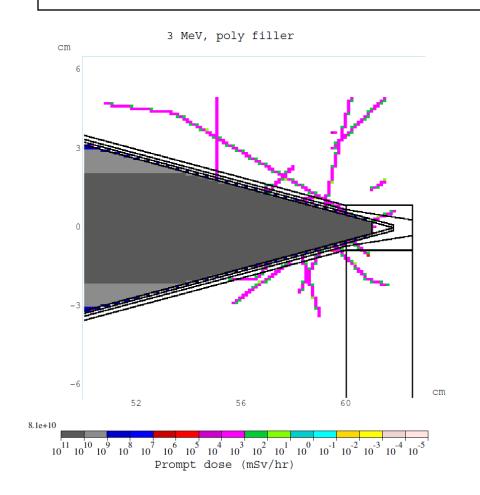

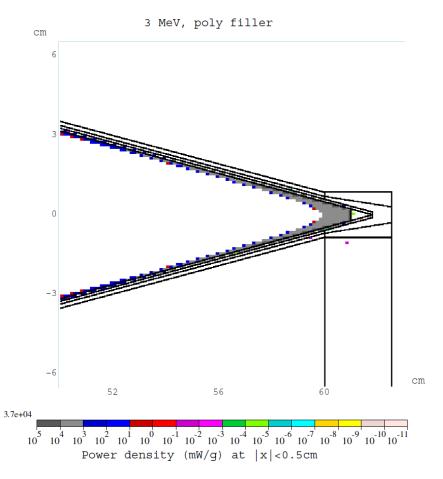


Max 37 W/g

## Prompt Dose at 10 MeV with and w/o Poly Filler

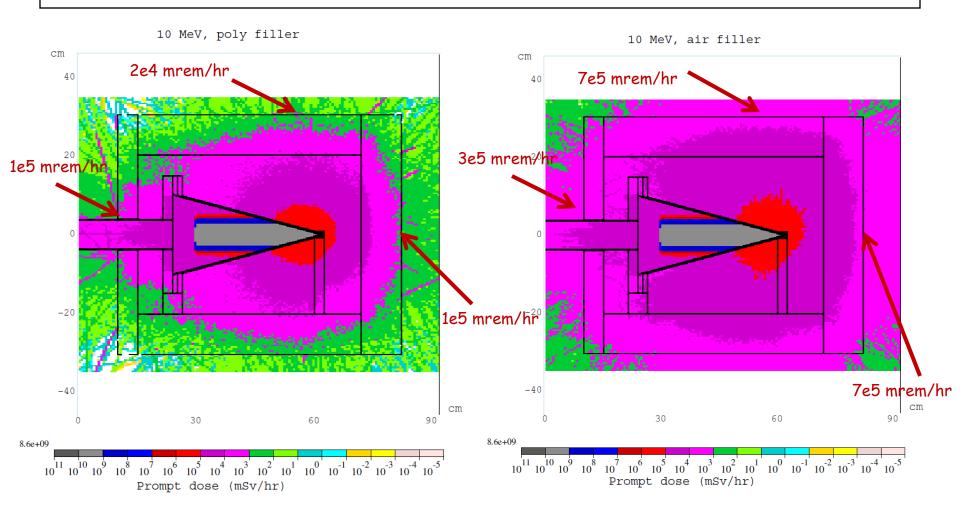


Enlarge beam pipe OD or reduce beam size?

## Neutron Dose at 10 MeV with and w/o Poly Filler

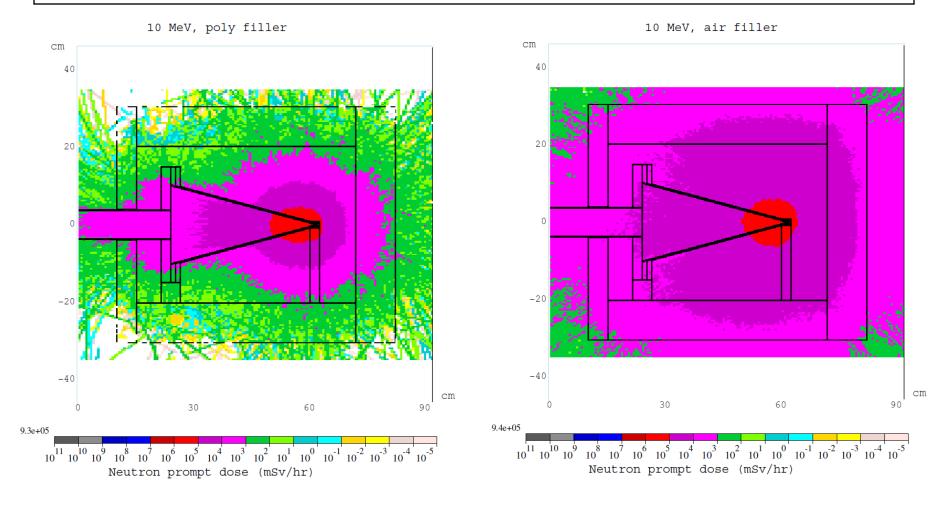

- 1. Poly filler works nicely.
- 2. Add poly or concrete on iron outside.


# Neutron (SPN) and Photon (SPG) Spectra Downstream of the Shielding Box

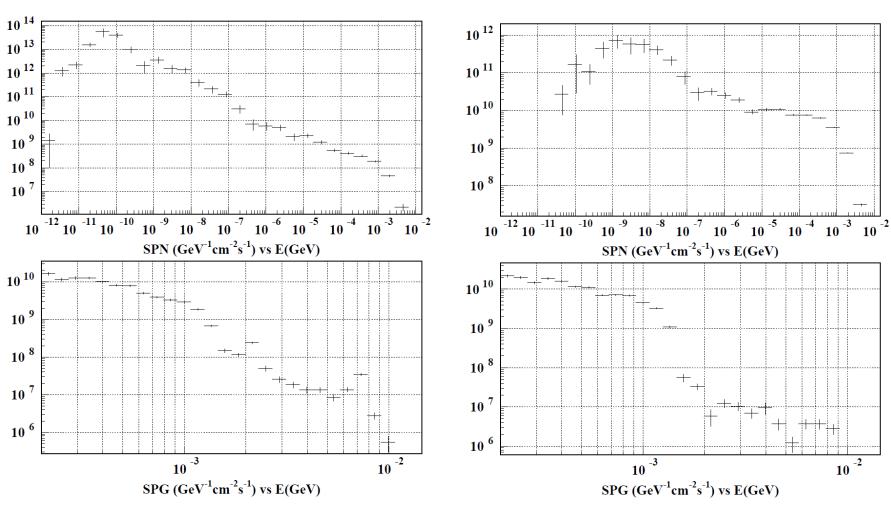


With poly filler

Without poly filler

## Prompt Dose and Power Density at 10 MeV

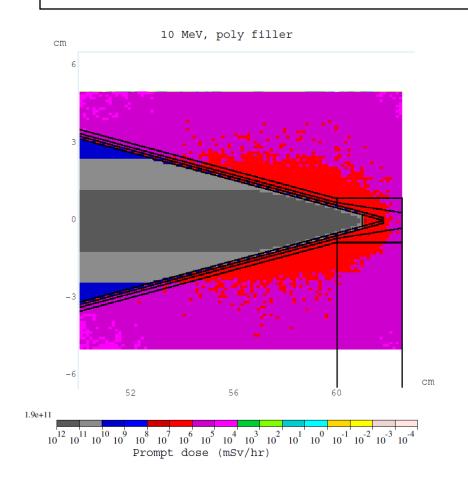

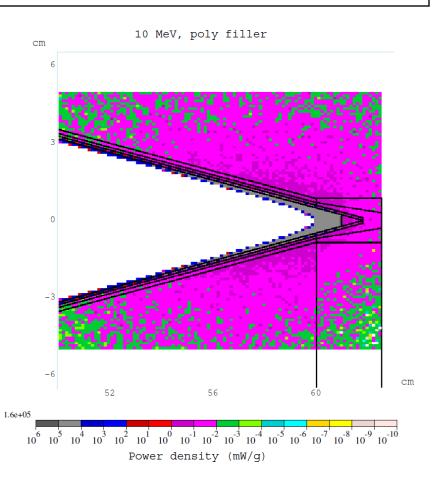

Max 160 W/g

#### Contact Residual Dose at 10 MeV

